



Product Data Sheet

# SFR ACOUSTI TILE®

AcoustiTile is designed with a patented “ultra” high-density wear layer on a molded base. This 24-by-24-by-1-inch modular tile offers enhanced impact absorption in moderate to extreme weight drop applications



Proprietary  
Installation System  
**Quad Blok**

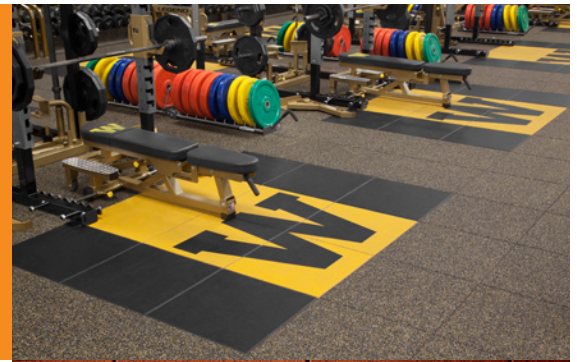

## Markets

- Fitness
- Sports
- Student Rec

## Applications

- Olympic lifting weight area

## Benefits

- 15 year warranty
- Enhanced impact absorption
- Easy installation with Quad Blok
- Slip resistant, wet or dry
- Extremely durable
- Custom color and logo options



## Product Options

### Size:

Available as a standard in tiles. All custom options should be discussed with your local agent to determine availability, pricing, minimums, and lead times.



Tile:  
1" x 24" (61cm) x 24" (61cm)



Reducers:  
4" (102mm) x 48" (1.22m)  
Thickness: 1"/25.4mm




ADA Ramp:  
12" (305mm) x 48" (1.22m)  
Thickness: 1"/25.4mm



Quad Blok:  
½" H x 4 ¾" x 4 ¾"  
Adhesive = 1 Tube / 15 Quad Bloks

### Quad Blok:



### Color Options:

- More than 15 color options.
- See website for complete listing.





## Technical Details

| Performance Criteria           | Test Standard | Typical Results        |
|--------------------------------|---------------|------------------------|
| Static Load Limit              | ASTM F970     | 0.005" (@400psi)       |
| Coefficient of Friction        | ASTM D2047    | > 0.9                  |
| VOC Compliant                  | ASTM D5116    |                        |
| FloorScore                     | CA 01350      | Certified              |
| Abrasion Resistance            | ASTM D3389    | 1 or 0.2 mg loss/cycle |
| Pill Test                      | ASTM D2859    | Pass                   |
| Standard Vertical Deformation  | ASTM F2772    |                        |
| Surface Effect Slip Resistance | ASTM F2772    |                        |
| Ball Rebound                   | ASTM F2772    |                        |
| Force Reduction                | ASTM F2772    |                        |
| Impact Insulation Class*       | ASM E492      | 56                     |
| Delta IIC*                     | ASTM E2179    | 27                     |

\*Tested on a 6" concrete slab with no ceiling.

